


Sleek Surface Pro Downlight

SM295C, SM296C

Mounting Instruction

441510928610

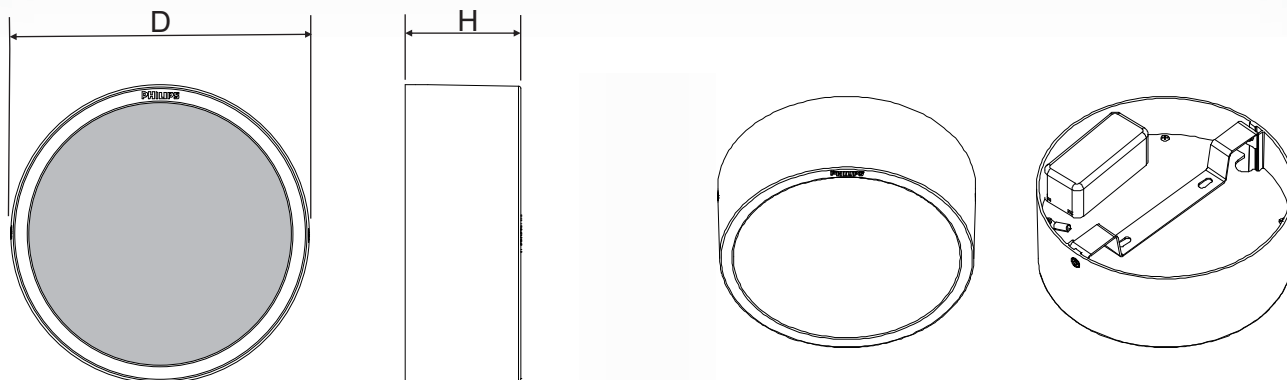

Type	Lumen Pack (lm)	Dimensions D x H (mm)	Voltage	Frequency	Kg
SM295C	600, 1000	Ø130 x 60	220-240V~	50Hz	0.45
SM296C	1200, 1500	Ø153 x 60	220-240V~	50Hz	0.55
SM296C	2000	Ø153 x 60	220-240V~	50Hz	0.40

Legend	
Abbreviation	Meaning
SM	Suspended Mounting
295C	5" Size
296C	6" Size

Installation Steps


Accessory Required	Description	Specs	Quantity
1 Self Tapping Screw		ST3.5 x 22mm (L), MS, ZN Pld & Clear Chromate	2 pcs
2 Plastic Anchors		ø6 x 25mm (L), NYLON 66, WHITE	2 pcs

Please make sure to arrange all the accessories before installation.


Note: Turn off the power before installation to avoid possible electrical shock.

1. Bracket Installation


Product Type	A
SM295C	50mm
SM296C	70mm

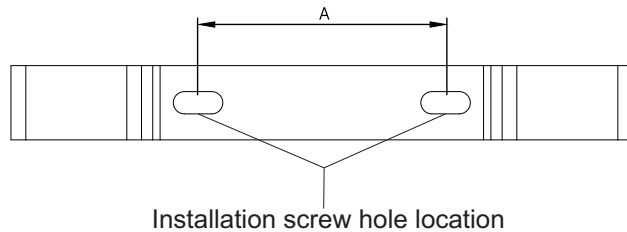


1.a



1.b




1.c



Mark

Drill

1.d




Take out the bracket by loosen up the screws, then rotate this bracket 180° and fix to the wall. Please refer to above illustration to drill hole and put the plastic anchors before installing the bracket.


(Note: Plastic anchors are not required in wooden walls.)

2. Wiring and Product installation


2.a

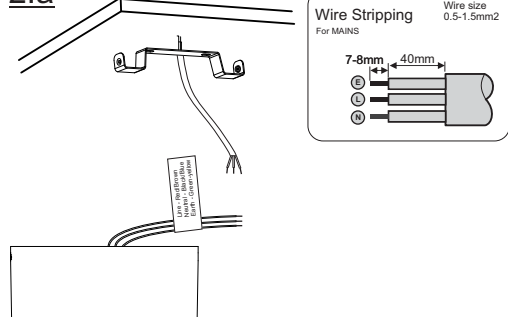


2.b



2.c



2.d



Connect the mains wires to L-N-E wires of the product. **(Note:** Turn off the power before installation).

Align the product with mounting bracket and screw from 2 sides. please refer to above illustration.

There will be 5mm gap between product and ceiling after mounting.

Caution

1. "The light source of this luminaire is not replaceable. when the light source reaches its end of life the whole luminaire shall be replaced".
2. Mounting surface should be flat.
3. Do not stare at the operating light source.
4. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

Warning

1. Choosing an appropriate fixing to suit the mounting surface is the responsibility of the installer.
2. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
3. The luminaire should be earthed properly for Safety and Performance.
4. Do not switch on before complete installation.

Maintenance

Ensure power supply is switched off before attempting any maintenance work.

The luminaire must be used within the applicable product specifications, installation instruction and environmental conditions for storage & operations according to application guidelines provided by Signify for product warranty to be valid.