



Complete solution with a 3-color dip switch for maximum flexibility and a hassle-free task. This downlight provides easy and immediate installation.

Ledinaire Downlight DN029B

Apply the perfect color temperature with the 3-color dip switch and enjoy hassle-free installation. The downlight is fully IC compliant and provides high energy savings without compromising on light quality.

Benefits

- Flexible to suit your needs with a 3-color dip switch and various output options
- Cost-effective and hassle-free solution with 50K hours lifetime
- Ease of indoor installation, IC compliant and IP44 (front side) protection

Ledinaire Downlight DN029B


Features

- 3 color temperature selector solutions with a long lifetime of 50K hours
- Save even more energy with the dimming feature
- IC complied to fit critical installation
- IP20 fitting with IP44 protection on the front

Application

- General lighting areas
- Residential
- Retail


Versions

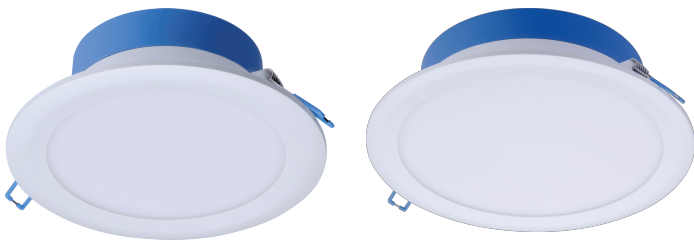

DN029B LED12/CCT 14W 220-240V D150 EU


DN029B LED20/CCT 24W 220-240V D200 EU

Dimensional drawing

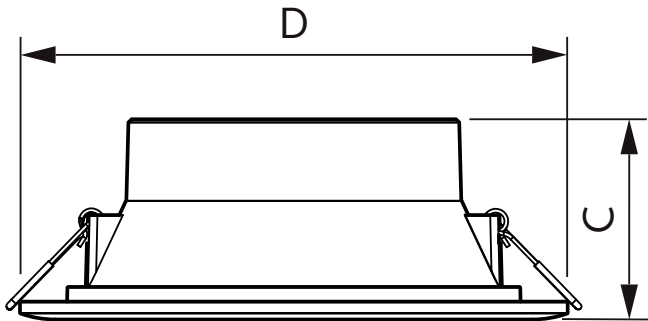

Product

DN029B LED12/CCT 14W 220-240V D150 EU

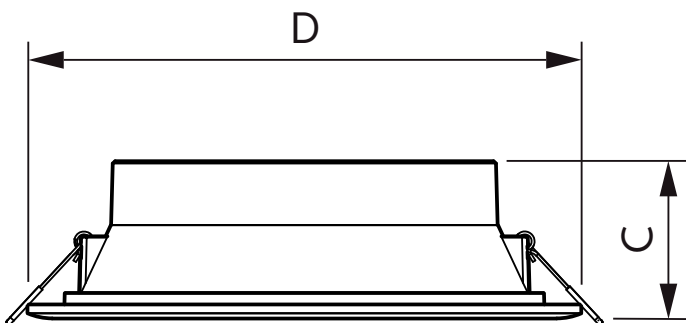

Product

DN029B LED20/CCT 24W 220-240V D200 EU

Ledinaire Downlight DN029B

Application Conditions

Ambient temperature range -20 to +40 °C

Approval and Application

Mech. impact protection code IK03

Ingress protection code IP20/44

Controls and Dimming

Dimmable No

Operating and Electrical

Input Voltage 220 to 240 V V

General Information

Protection class IEC Safety class II

Light source replaceable No

Initial Performance (IEC Compliant)

Initial chromaticity (3000K@x=, 0.4339y=, 0.40334300K@x= 0.3647y=0.36076 500K@x=0.3123y= 0.3284) 5SDCM

Init. Corr. Color Temperature 3000 K

Init. Color Rendering Index 80

Mechanical and Housing

Color White

Initial Performance (IEC Compliant)

Order Code	Full Product Name	Initial LED luminaire efficacy	Initial luminous flux	Initial input power
929002066219	DN029B LED12/CCT 14W 220-240V D150 EU	85.00 lm/W	1200 lm	14 W
929002066319	DN029B LED20/CCT 24W 220-240V D200 EU	83.00 lm/W	2000 lm	24 W

