



TL-D Standard Colours

TL-D 10W/54-765 1SL/50

TL-D Standard Colors lamps (tube diameter of 26 mm) create atmospheres from warm white to cool daylight. Lamps with moderate efficacy and color rendering.

Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Controls and Dimming	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Dimmable	Yes
Life to 50% Failures (Nom)	5000 h		
Light Technical		Approval and Application	
Color Code	54-765	Energy Efficiency Label (EEL)	B
Luminous Flux (Nom)	390 lm	Mercury (Hg) Content (Nom)	8.0 mg
Color Designation	Cool Daylight		
Lumen Maintenance 2000 h (Nom)	85 %	Product Data	
Lumen Maintenance 5000 h (Nom)	80 %	Full product code	871150064130465
Correlated Color Temperature (Nom)	6200 K	Order product name	TL-D 10W/54-765 1SL/50
Color Rendering Index (Nom)	75	EAN/UPC - Product	8711500641304
Operating and Electrical		Order code	928024005436
Power (Nom)	10.0 W	Numerator - Quantity Per Pack	1
Lamp Current (Nom)	0.230 A	Numerator - Packs per outer box	50
Voltage (Nom)	46 V	Material Nr. (12NC)	928024005436
		Net Weight (Piece)	0.045 kg
		ILCOS Code	FD-10/62/2A-E-G13

TL-D Standard Colours


Dimensional drawing

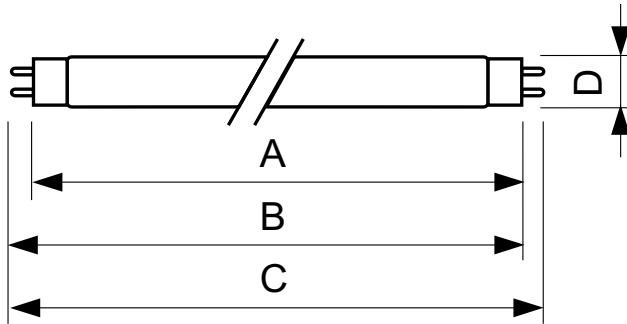


TL-D 10W/54-765

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 10W/54-765 1SL/50	28 mm	331.5 mm	338.6 mm	336.2 mm	345.7 mm

Photometric data

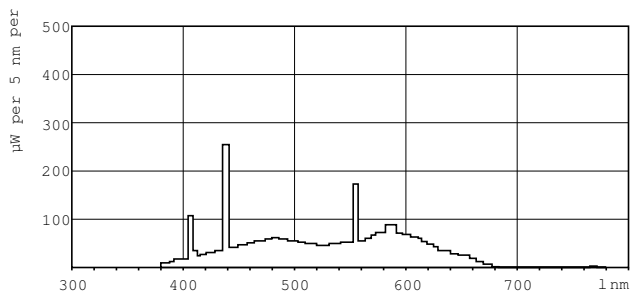


LDPB_TL-DSTD_54-765-Spectral power distribution B/W

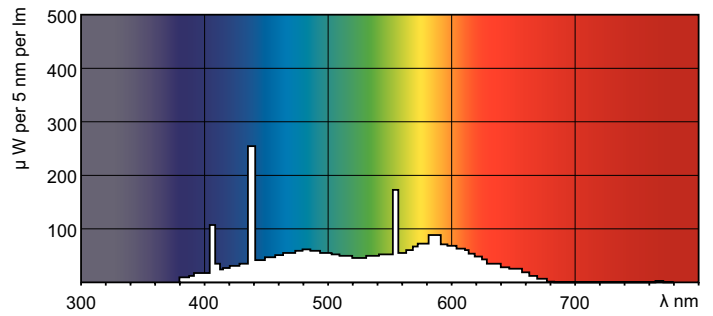


LDPO_TL-DSTD_54-765-Spectral power distribution Colour

Lifetime

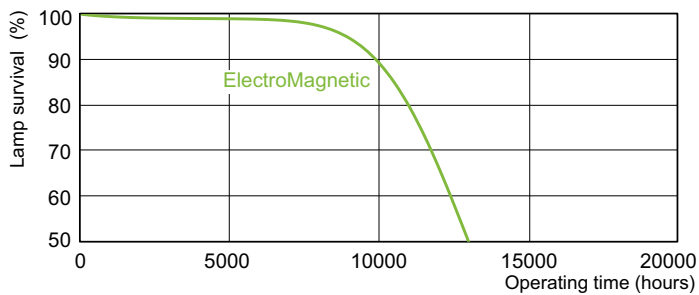


LDLE_TL-DSTD_0001-Life expectancy diagram

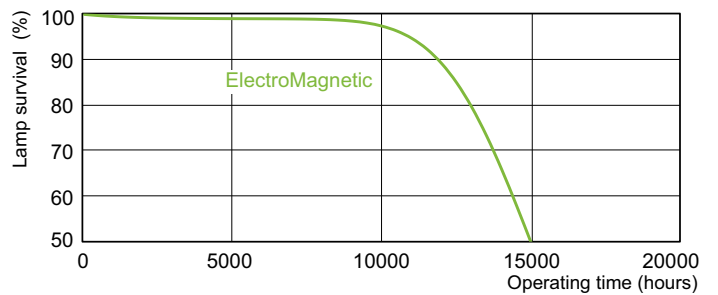

LDLE_TL-DSTD_0002-Life expectancy diagram

TL-D Standard Colours

Lifetime

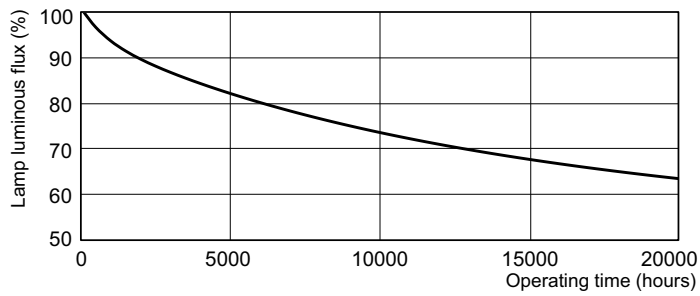

LDLM_TL-DSTD_0001-Lumen maintenance diagram

