



TL-E LIFEMAX

Standard Colours

TL-E 40W/54-765 1CT/20

This circular TL lamp (tube diameter 29 mm) enables omni-directional light distribution. It is suitable for use in a wide range of luminaires for various purposes where color rendering is not important.


Product data

General information	
Cap-Base	G10Q [G10q]
Life to 50% Failures (Nom)	13000 h
Light technical	
Color Code	54-765
Luminous Flux (Nom)	2500 lm
Color Designation	Cool Daylight
Lumen Maintenance 10000 h (Nom)	73 %
Lumen Maintenance 2000 h (Nom)	87 %
Lumen Maintenance 5000 h (Nom)	78 %
Correlated Color Temperature (Nom)	6200 K
Luminous Efficacy (rated) (Nom)	62 lm/W
Color Rendering Index (Nom)	72
Operating and electrical	
Power (Nom)	40.0 W
Lamp Current (Nom)	0.420 A
Voltage (Nom)	110 V
Controls and dimming	
Dimmable	Yes

Mechanical and housing	
Bulb Shape	C-T9 [C-T9 29 mm]
Approval and application	
Mercury (Hg) Content (Nom)	9 mg
Product data	
Full product code	871150055991301
Order product name	TL-E 40W/54-765 1CT/20
EAN/UPC - Product	8711500559913
Order code	928027405436
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20
Material Nr. (12NC)	928027405436
Net Weight (Piece)	0.250 kg
ILCOS Code	FSC-40/62/2A-E-G10q-29/400

TL-E LIFEMAX Standard Colours


Dimensional drawing




Product	D (max)	D (min)	E (min)	E (max)	I (min)	I (max)
TL-E 40W/ 54-765 1CT/20	30.9 mm	27.1 mm	393.7 mm	406.4 mm	341.0 mm	347.7 mm

TL-E 40W/54-765 1CT/20

Photometric data

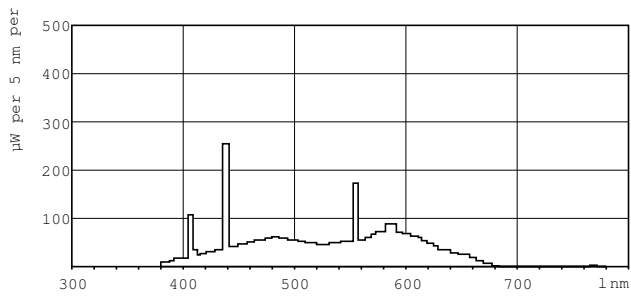

LDPB_TL-ESTD_54-765-Spectral power distribution B/W

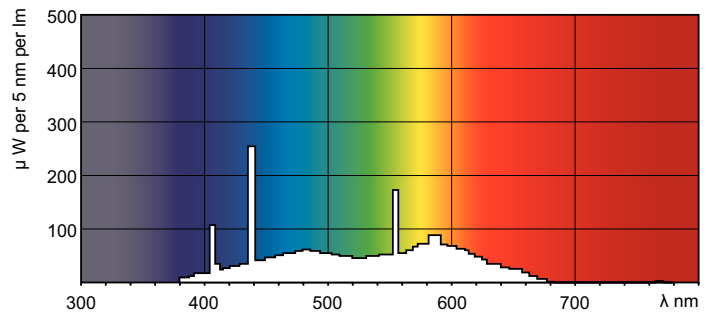

LDPO_TL-ESTD_54-765-Spectral power distribution Colour

