



TL-D Standard Colours

TL-D 36W/29-530 1SL/25

TL-D Standard Colors lamps (tube diameter of 26 mm) create atmospheres from warm white to cool daylight. Lamps with moderate efficacy and color rendering.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information		Voltage (Nom)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	103 V	
Life To 10% Failures (Nom)	10000 h	Controls and Dimming	
Life to 50% Failures (Nom)	13000 h	Dimmable	Yes
Light Technical		Mechanical and Housing	
Color Code	29-530	Bulb Shape	T8 [26 mm (T8)]
Luminous Flux (Nom)	2975 lm	Approval and Application	
Color Designation	Warm White (WW)	Mercury (Hg) Content (Nom)	8.0 mg
Lumen Maintenance 10000 h (Nom)	75 %	Product Data	
Lumen Maintenance 2000 h (Nom)	90 %	Full product code	694793919442100
Lumen Maintenance 5000 h (Nom)	80 %	Order product name	TL-D 36W/29-530 1SL/25
Correlated Color Temperature (Nom)	2900 K	EAN/UPC - Product	6947939194421
Color Rendering Index (Nom)	51	Order code	928048502953
Operating and Electrical		Numerator - Quantity Per Pack	1
Power (Nom)	36.0 W	Numerator - Packs per outer box	25
Lamp Current (Nom)	0.440 A		

TL-D Standard Colours

Material Nr. (12NC)	928048502953
Net Weight (Piece)	0.140 kg
ILCOS Code	FD-36/29/3-E-G13


Dimensional drawing

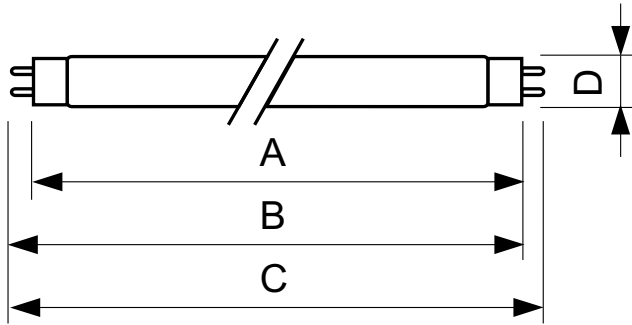

TL-D 36W/29-530

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 36W/29-530 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm


Photometric data

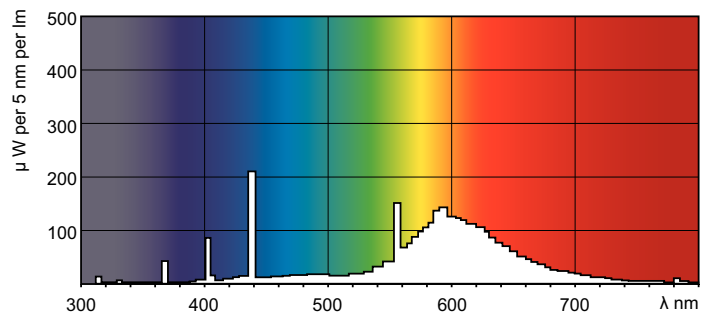


LDPB_TL-DSTD_29-530-Spectral power distribution B/W

LDPO_TL-DSTD_29-530-Spectral power distribution Colour

Lifetime

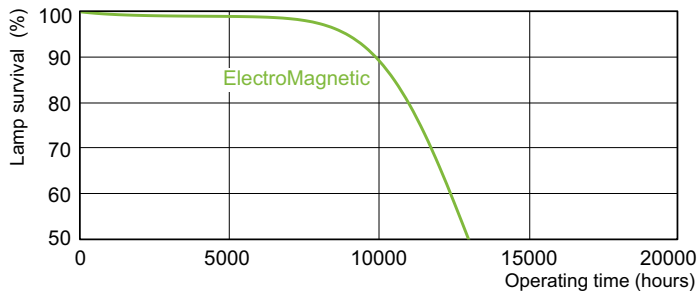


LDLE_TL-DSTD_0001-Life expectancy diagram

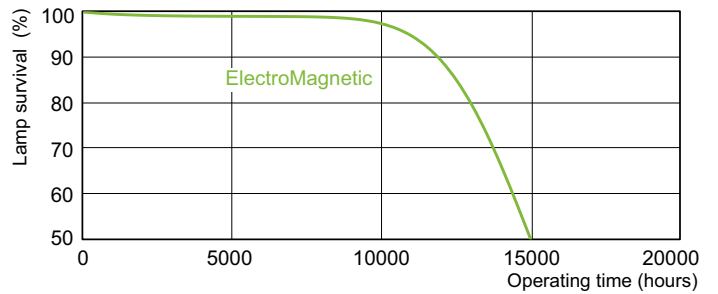

LDLE_TL-DSTD_0002-Life expectancy diagram

TL-D Standard Colours

Lifetime

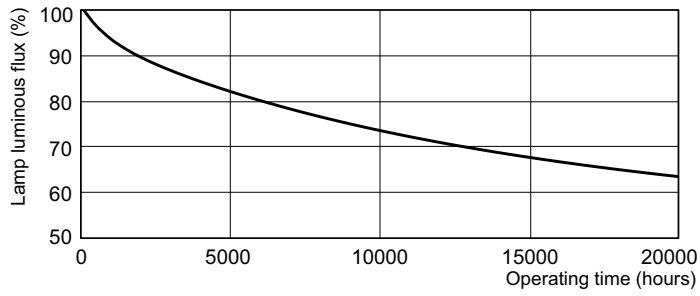

LDLM_TL-DSTD_0001-Lumen maintenance diagram

