



# TL-D Colored

## TL-D Colored 58W Blue 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

| General Information         |                                  | Voltage (Nom)                 |                  |
|-----------------------------|----------------------------------|-------------------------------|------------------|
| Cap-Base                    | G13 [ Medium Bi-Pin Fluorescent] | 111 V                         |                  |
| Life To 10% Failures (Nom)  | 12000 h                          | Temperature                   |                  |
| Life to 50% Failures (Nom)  | 15000 h                          | Design Temperature (Nom)      | 25 °C            |
| Light Technical             |                                  | Controls and Dimming          |                  |
| Color Code                  | 180                              | Dimmable                      | Yes              |
| Luminous Flux (Nom)         | 1600 lm                          | Mechanical and Housing        |                  |
| Luminous Flux (Rated) (Nom) | 1600 lm                          | Bulb Shape                    | T8 [ 26 mm (T8)] |
| Color Designation           | Blue (B)                         | Approval and Application      |                  |
| LLMF 2000 h Rated           | 95 %                             | Mercury (Hg) Content (Nom)    | 13.0 mg          |
| Operating and Electrical    |                                  | Energy Consumption kWh/1000 h | 71 kWh           |
| Power (Nom)                 | 58.5 W                           |                               |                  |
| Lamp Current (Nom)          | 0.670 A                          |                               |                  |


## TL-D Colored

### Product Data

|                               |                              |
|-------------------------------|------------------------------|
| Full product code             | 871150095451040              |
| Order product name            | TL-D Colored 58W Blue 1SL/25 |
| EAN/UPC - Product             | 8711500954510                |
| Order code                    | 928049001805                 |
| Numerator - Quantity Per Pack | 1                            |

|                                 |              |
|---------------------------------|--------------|
| Numerator - Packs per outer box | 25           |
| Material Nr. (12NC)             | 928049001805 |
| Net Weight (Piece)              | 167.000 g    |


### Dimensional drawing

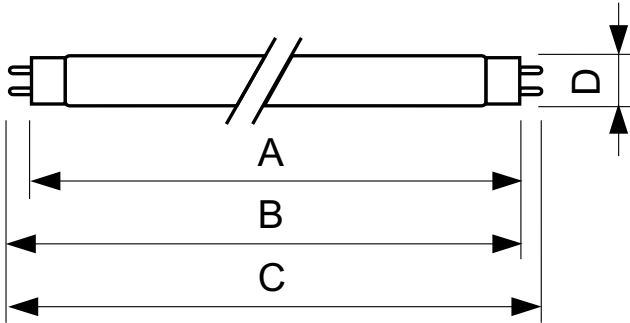

TL-D 58W/180 Blue

| Product                         | D (max) | A (max)   | B (max)   | B (min)   | C (max)   |
|---------------------------------|---------|-----------|-----------|-----------|-----------|
| TL-D Colored 58W<br>Blue 1SL/25 | 28.0 mm | 1500.0 mm | 1507.1 mm | 1504.7 mm | 1514.2 mm |

### Photometric data

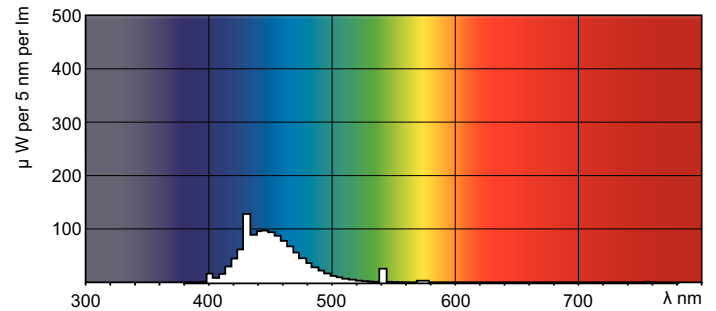

LDPB\_TL-DCOL\_180-Spectral power distribution B/W

LDPO\_TL-DCOL\_180-Spectral power distribution Colour

