



MASTER VALUE LEDs pot LV

MASTER LED 4-35W 3000K MR16 24D

Philips MASTER VALUE MR16 is the series of Low Voltage (12VAC) Halogen MR16 replacements. Not only does it employ Philips' patented solution to guarantee the broadest possible compatibility with standard 12V Halogen electronic transformers. It also delivers beam intensity which is equivalent to the 50W Philips Halogen MR16 lamps. The form-factor of Philips MASTER Value LED MR16 guarantees a 100% form on the back-side of the lamp (exact form with Halogen lamps.)

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

| General Information | |
|------------------------|----------------|
| Cap-Base | GU5.3 [GU5.3] |
| EU RoHS compliant | Yes |
| Nominal Lifetime (Nom) | 25000 h |
| Switching Cycle | 50000X |
| Technical Type | 4-35W |

| Light Technical | |
|--------------------------|---------------------|
| Color Code | 830 [CCT of 3000K] |
| Beam Angle (Nom) | 24 ° |
| Luminous Flux (Nom) | 240 lm |
| Luminous Intensity (Nom) | 1000 cd |
| Color Designation | White (WH) |

| | |
|---------------------------------------|------------|
| Correlated Color Temperature (Nom) | 3000 K |
| Luminous Efficacy (rated) (Nom) | 65.00 lm/W |
| Color Consistency | <6 |
| Color Rendering Index (Nom) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Luminous Flux in 90° Cone (Rated) | 225 lm |


| Operating and Electrical | |
|--------------------------|--------|
| Input Frequency | - Hz |
| Power (Nom) | 3.4 W |
| Lamp Current (Nom) | 520 mA |
| Wattage Equivalent | 35 W |
| Starting Time (Nom) | 0.5 s |

MASTER VALUE LEDspot LV

| | |
|---------------------------------|--------------------|
| Warm Up Time to 60% Light (Nom) | instant full light |
| Power Factor (Nom) | 0.7 |
| Voltage (Nom) | 12 V |
| Temperature | |
| T-Case Maximum (Nom) | 65 °C |
| Controls and Dimming | |
| Dimmable | No |
| Mechanical and Housing | |
| Bulb Shape | MR16 [2inch/50mm] |
| Approval and Application | |
| Suitable For Accent Lighting | Yes |

| | |
|---------------------------------|---------------------------------|
| Energy Consumption kWh/1000 h | 4 kWh |
| Product Data | |
| Full product code | 871869647625300 |
| Order product name | MASTER LED 4-35W 3000K MR16 24D |
| EAN/UPC - Product | 8718696476253 |
| Order code | 929001147708 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 929001147708 |
| Net Weight (Piece) | 0.035 kg |



Dimensional drawing



LED VLE 3.4-20W GU5.3 830 MR16 24D

| Product | D | C |
|---------------------------------|-------|-------|
| MASTER LED 4-35W 3000K MR16 24D | 50 mm | 49 mm |

Photometric data

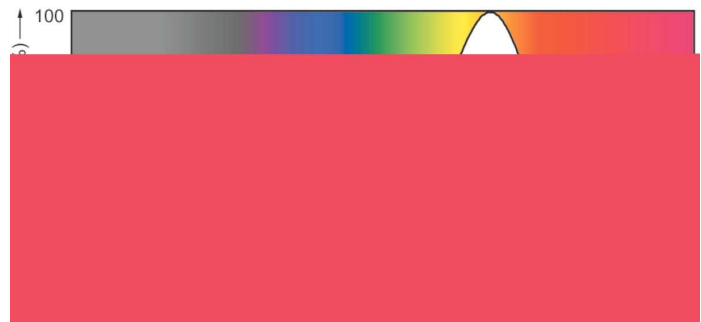

MASTER VALUE LEDspot LV

