



# HF-Selectalume II for TL5 lamps

## HF-S 254 TL5 II 220-240V 50/60Hz

HF-Selectalume II TL5 is the most cost-effective, reliable and outstanding solution for fluorescent lamps. These ballasts are part of an overall high-efficiency lighting system that may help you or your customers to achieve any international or local energy code you need to comply with. HF-Selectalume II TL5 ballasts are the ideal choice for a broad range of new construction and retrofit applications within the commercial sector, including general surface mounting or office lighting, parking garages, warehouses, waterproof and other applications. The ballast is primarily designed for Indoor application. For outdoor application, the luminaire should be minimum Classland need to be sufficiently protected against water & dust. The installation should also be guard against any lightening surge or any other necessary electrical protection as deemed in such typical installation & application.

### Product data


Operating and Electrical		T-Case Maximum (Max)	
Input Voltage	220 to 240 V		75 °C
Line Frequency	50 to 60 Hz	Mechanical and Housing	
Input Frequency	50 to 60 Hz	Housing	L 280x30x21
Earth Leakage Current (Max)	0.5 mA	Ingress protection code	IP20 [Finger-protected]
Inrush Current Width	0.38 ms	Net Weight (Piece)	0.221 kg
Inrush Current Peak (Max)	28 A	Approval and Application	
Wiring		Energy Efficiency Index	A2 BAT
Connector Type Input Terminals	WAGO 744 connector	Approval Marks	F-Marking CE marking ENEC certificate CCC certificate C-Tick certificate PSB certification TISI marking SIRIM approval CB Certificate CCC certificate VDE-EMV certificate
Connector Type Output Terminals	WAGO 744 connector [Suitable for manual wiring]		
Temperature			
T-Case Lifetime (Nom)	75 °C		

## HF-Selectalume II for TL5 lamps

Ambient temperature range	-15 °C to 50 °C
<b>Product Data</b>	
Order product name	HF-S 254 TL5 II 220-240V 50/60Hz
Full product name	HF-S 254 TL5 II 220-240V 50/60Hz
Full product code	872790090562500
Order code	913713033766

Material Nr. (12NC)	913713033766
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500999382
Numerator - Packs per outer box	12
EAN/UPC - Case	8727900905625

### Dimensional drawing

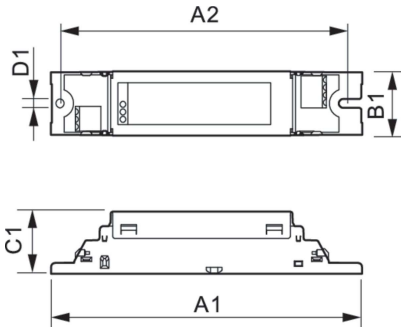

Product	D1	C1	A1	A2	B1
HF-S 254 TL5 II 220-240V 50/60Hz	4.1 mm	21.5 mm	360.0 mm	350.0 mm	30.0 mm

