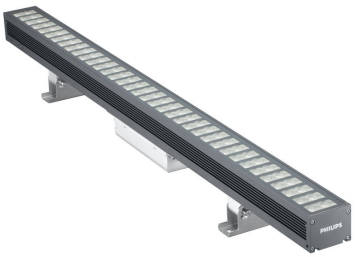

UniStrip G4

BCP384 36LED 30K 220V A2 L100 DMX D2

UniStrip G4, 6160 lm, 80 W, Warm white, Dynamix DMX, Safety class I

UniStrip G4 is a surface mounted, exterior-rated LED luminaire that is designed for façade and outdoor architectural lighting applications. One family that fits all your needs, wall washing, grazing and also linear flood lighting. The robust mechanical and unique optical designs make it ideal for illuminating buildings facades, bridges, overpasses and any application that requires a linear lighting solution. Available in white, monochromatic colors, RGB, RGBW and tunable white and DMX control option available with up to 8 pixels (8IDs) to give architects and designers the freedom to explore a wide range of concepts and design with no limitations.

Warnings and Safety

- For outdoor use only

Product data

General Information	
Driver included	Yes
Lighting Technology	LED
CE mark	CE mark
Flammability mark	For mounting on normally flammable surfaces

Light Technical	
Luminous Flux	6,160 lm
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	77 lm/W
Color rendering index (CRI)	80
Light source color	Warm white
Optical cover type	Tempered glass

Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	60 A
Power Consumption	80 W
Power Factor (Fraction)	0.9
Connection	Flying leads/wires and 2 Push-in connector 4-pole

UniStrip G4

Cable	Cable 0.3 m without plug 3-pole + 2 Cables 0.3 m with connector 4-pole

Temperature

Ambient temperature range	-40 to +50 °C

Controls and Dimming

Dimmable	Yes
Control interface	Dynamix DMX

Mechanical and Housing

Housing Material	Aluminum extruded
Optical cover material	Polymethyl methacrylate
Housing Color	Dark gray
Effective projected area	0.085 m²

Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK06 [1 J]
Protection class IEC	Safety class I

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	SDCM = 4
Power consumption tolerance	+/-10%

Product Data

Order product name	BCP384 36LED 30K 220V A2 L100 DMX D2
Full product name	BCP384 36LED 30K 220V A2 L100 DMX D2
Full product code	871951492210599
Order code	911401736643
Material Nr. (12NC)	911401736643
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514922105
Numerator - Packs per outer box	4
EAN/UPC - Case	8719514922105

Dimensional drawing

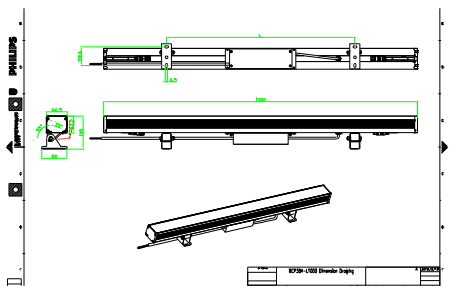

© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.