



CorePro LEDtube EM/ Mains T8



CorePro LEDtube 1200mm 14.5W840

Philips CorePro LEDtubes are the quick and easy way to replace T8 fluorescent or other LED tubes with a fast pack back time. Not only does the Core range of LEDtubes require a low initial investment, but LED energy efficiency also delivers instant savings that you can bank on over a long and reliable lifetime. Plus, with the same lamp size and light distribution as fluorescent alternatives, you'll never know the difference. There are two ways to install these LED tubes: Rewire your existing fluorescent-based luminaires so the CorePro LEDtubes work directly on the Mains. Or simply change the fluorescent starter to an LED starter that can be used with your Electromagnetic ballasts.

Warnings and Safety

- NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.
- Installation must be done according to the installation diagrams provided with the lamp or available online. Installation must be done by a certified professional.

Product data

General Information		Light Technical	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Color Code	840 [CCT of 4000K]
Nominal lifetime	30,000 hour(s)	Beam Angle (Nom)	240 degree(s)
Switching Cycle	200,000	Luminous Flux	1,600 lm
Lighting Technology	LED	Color Designation	Cool White (CW)
Flux measurement reference	Sphere	Correlated Color Temperature (Nom)	4000 K
CE mark	Yes	Luminous Efficacy (rated) (Nom)	110 lm/W
EU RoHS compliant	Yes	Color Consistency	<6
		Color rendering index (CRI)	80
		LLMF At End Of Nominal Lifetime (Nom)	70 %

CorePro LEDtube EM/Mains T8

Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.9
Photobiological safety according to EN 62471	RGO

Operating and Electrical

Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	14.5 W
Lamp Current (Nom)	70 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	36 W

Temperature

Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	40 °C

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
-------------	---------

Bulb Material	Glass
Product Length	1,200 mm
Bulb Shape	T8

Approval and Application

Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	15 kWh
EPREL Registration Number	467308

Product Data


Order product name	CorePro LEDtube 1200mm 14.5W840
Full product name	CorePro LEDtube 1200mm 14.5W840
Full product code	871951432535700
Order code	929003022302
Material Nr. (12NC)	929003022302
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514325357
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514325364

Dimensional drawing


Product	D1	D2	A1	A2	A3
CorePro LEDtube 1200mm 14.5W840	25.7 mm	28 mm	1,198 mm	1,205 mm	1,212 mm

CorePro LEDtube EM/Mains T8


Photometric data



Light Distribution Diagram - CorePro LEDtube 1200mm 14.5W840

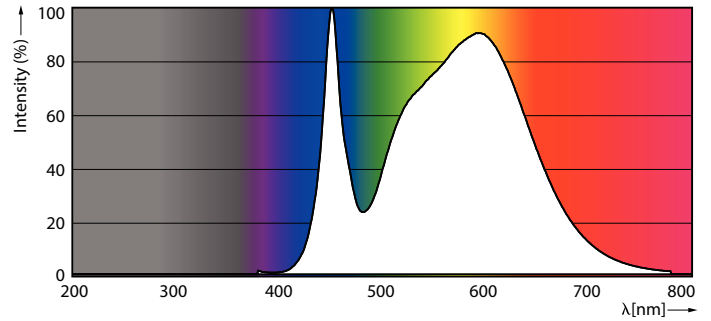


Spectral Power Distribution Colour - CorePro LEDtube 1200mm 14.5W840




General uniform lighting - CorePro LEDtube 1200mm 14.5W840

Lifetime

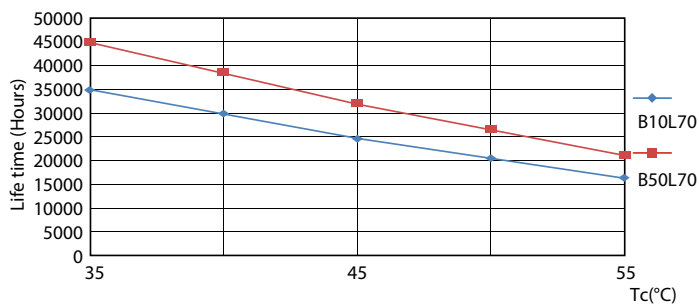



Life Expectancy Diagram - CorePro LEDtube 1200mm 14.5W840

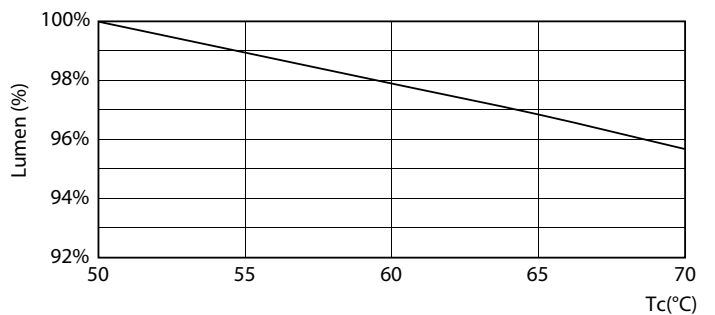

Lumen Maintenance Diagram - CorePro LEDtube 1200mm 14.5W840


CorePro LEDtube EM/Mains T8

Lifetime

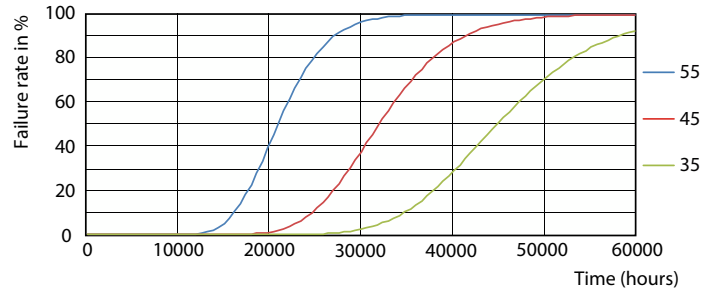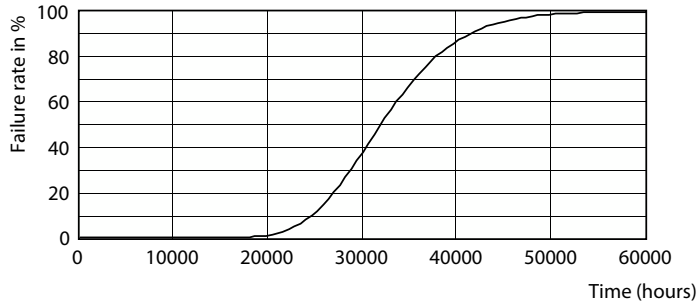

Life Expectancy Diagram - CorePro LEDtube 1200mm 14.5W840

Life Expectancy Diagram - CorePro LEDtube 1200mm 14.5W840

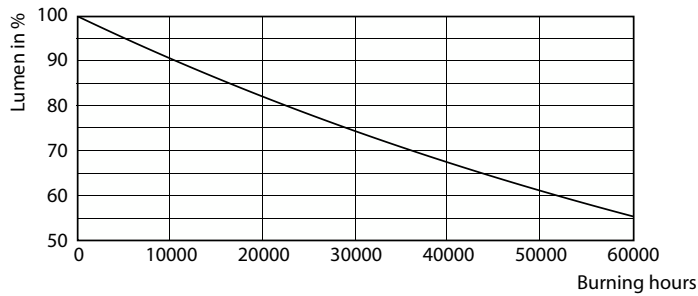

Lumen Maintenance Diagram - CorePro LEDtube 1200mm 14.5W840

