



CoreLine Wall-mounted

WL130V LED12S/840 PSU WH

LED Module 1200 lm - 840 neutral white - Power supply unit - White

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Wall-mounted range of LED products can be used to replace traditional wall-mounted luminaires incorporating compact fluorescent lamps. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Product data

General Information			
Lamp family code	LED12 [LED Module 1200 lm]	Glow-wire test	650/30 [Temperature 650 °C, duration 30 s]
Beam angle of light source	120 °	Flammability mark	NO [-]
Lamp colour code	840 neutral white	CE mark	CE mark
Light source replaceable	No	ENEC mark	ENEC mark
Number of gear units	1 unit	Warranty period	5 years
Driver/power unit/transformer	PSU [Power supply unit]	Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires – January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.
Driver included	Yes	Constant light output	No
Optic type	Opal prismatic reflector	Number of products on MCB (16 A type B)	32
Optical cover/lens type	OP [Opal bowl with painted cover]		
Luminaire light beam spread	120°		
Control interface	-		
Connection	PI [Push-in connector 3-pole]		
Cable	-		
Protection class IEC	Safety class II (II)		

CoreLine Wall-mounted

EU RoHS compliant	Yes
-------------------	-----

Operating and Electrical

Input Voltage	220-240 V
Input frequency	50 to 60 Hz
Control signal voltage	-
Initial CLO power consumption	NA W
Average CLO power consumption	NA W
End CLO power consumption	NA W
Inrush current	12.3 A
Inrush time	1.44 ms
Power factor (min.)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing material	Polyamide
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	-
Optical cover/lens finish	Opal
Overall length	350 mm
Overall width	350 mm
Overall height	70 mm
Overall diameter	350 mm
Colour	White
Dimensions (height x width x depth)	70 x 350 x 350 mm (2.8 x 13.8 x 13.8 in)

Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]

Initial Performance (IEC Compliant)

Initial luminous flux	1200 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	80
Initial chromaticity	(0.39, 0.39) SDCM<3
Initial input power	12 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	5 %
Lumen maintenance at median useful life* 50,000 h	L70

Application Conditions


Ambient temperature range	-20 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	Not applicable
Suitable for random switching	Yes

Product Data

Full product code	871869938779299
Order product name	WL130V LED12S/840 PSU WH
EAN/UPC – product	8718699387792
Order code	38779299
Numerator – quantity per pack	1
SAP numerator – packs per outer box	6
Material no. (12 NC)	912401483183
SAP net weight (piece)	1.390 kg





Dimensional drawing



CoreLine Wall-mounted WL130V/WL131V

CoreLine Wall-mounted

Photometric data

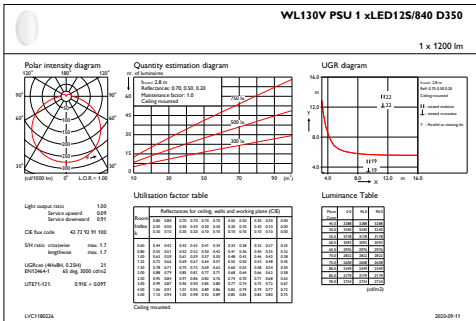

IFGU1_WL130VPSU1xLED12S840D350

OFPC1_WL130VPSU1xLED12S840D350

