



GreenSpace

DN460B LED11S/840 PSU-E C WH P

150mm - LED Module, system flux 1100 lm - 840 neutral white - Power supply unit DC compatible, external - High-gloss mirror - Feed-through connector 3-pole - Finger-protected - White RAL 9003

Customers want to strike the ideal balance between their initial investment and the cost of the installation during its lifetime. GreenSpace is a cost-efficient and sustainable downlight that can be used to replace conventional CFL downlights in general lighting applications. It features the latest LED technology, which enables extremely low power consumption, while delivering consistent light output, stable color performance and high color rendering. The product's long lifetime makes it a true 'fit and forget' solution.

Product data

General Information			
Number of light sources	1 pc	Connection	Feed-through connector 3-pole
Lamp family code	LED11S [LED Module, system flux 1100 lm]	Cable	-
Beam angle of light source	- °	Protection class IEC	Safety class II
Light source color	840 neutral white	Glow-wire test	Temperature 750 °C, duration 5 s
Cap-Base	- [-]	Flammability mark	-
Light source replaceable	No	CE mark	CE mark
Number of gear units	1 unit	ENEC mark	ENEC mark
Gear	-	Warranty period	5 years
Driver/power unit/transformer	Power supply unit DC compatible, external	Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example
Driver included	Yes		
Optic type	High-gloss mirror		
Luminaire light beam spread	120°		
Control interface	-		

	B10. Therefore, the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB of 16 A type B	36
EU RoHS compliant	Yes
Service tag	Yes
Product family code	DN460B [150mm]
Unified glare rating CEN	22

Light Technical

Optical cover/lens type accessory	-
-----------------------------------	---

Operating and Electrical

Input Voltage	220-240 V
Input Frequency	50 to 60 Hz
Initial CLO power consumption	- W W
Average CLO power consumption	- W W
Inrush current	15.8 A
Inrush time	0.224 ms
Power Factor (Min)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing Material	Polycarbonate
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover/lens material	-
Fixation material	-
Optical cover/lens finish	-
Overall height	77 mm
Overall diameter	166 mm
Color	White RAL 9003
Dimensions (Height x Width x Depth)	77 x NaN x NaN mm (3 x NaN x NaN in)

Approval and Application

Ingress protection code	IP20 [Finger-protected]
-------------------------	--------------------------

Mech. impact protection code	IK02 [0.2 J standard]
------------------------------	------------------------

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1125 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	114 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.38, 0.38) SDCM <3.5
Initial input power	9.8 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L80

Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Yes

Product Data

Full product code	871869979320300
Order product name	DN460B LED11S/840 PSU-E C WH P
EAN/UPC - Product	8718699793203
Order code	912500100515
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	912500100515
Net Weight (Piece)	0.555 kg




Dimensional drawing

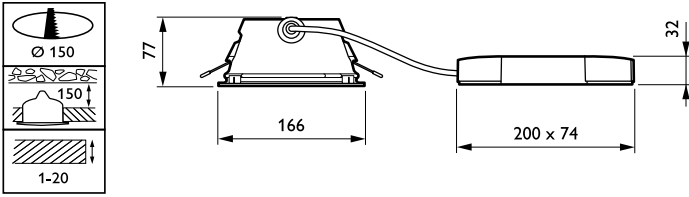


GreenSpace gen2 DN460B-DN473B

Photometric data

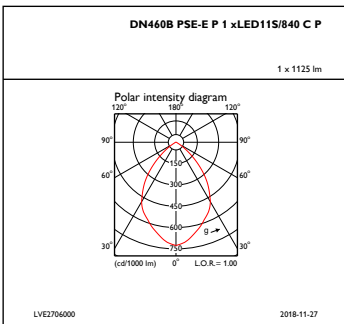

IFPC1_DN460BPSE-EP1xLED11S840CP

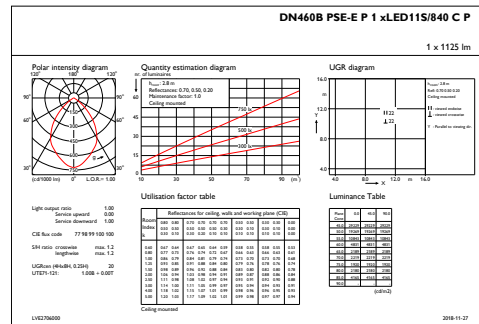

IFGU1_DN460BPSE-EP1xLED11S840CP

