



# GreenSpace

## DN460B LED11S/840 PSD-VLC-E C ELP3 WH P

150mm - LED Module, system flux 1100 lm - 840 neutral white - Power supply unit with DALI interface, DC compatible, external - High-gloss mirror - Emergency lighting 3 hours duration - Feed-through connector 5-pole - Finger-protected - White RAL 9003

Customers want to strike the ideal balance between their initial investment and the cost of the installation during its lifetime. GreenSpace is a cost-efficient and sustainable downlight that can be used to replace conventional CFL downlights in general lighting applications. It features the latest LED technology, which enables extremely low power consumption, while delivering consistent light output, stable color performance and high color rendering. The product's long lifetime makes it a true 'fit and forget' solution.

### Product data

General information		Optic type	
Number of light sources	1 pc	Optic type	High-gloss mirror
Lamp family code	LED11S [ LED Module, system flux 1100 lm]	Luminaire light beam spread	120°
Beam angle of light source	- °	Emergency lighting	Emergency lighting 3 hours duration
Light source color	840 neutral white	Control interface	DALI
Cap-Base	- [ -]	Connection	Feed-through connector 5-pole
Light source replaceable	No	Cable	-
Number of gear units	1 unit	Protection class IEC	Safety class II
Gear	-	Glow-wire test	Temperature 750 °C, duration 5 s
Driver/power unit/transformer	Power supply unit with DALI interface, DC compatible, external	Flammability mark	-
Driver included	Yes	CE mark	CE mark
		ENEC mark	ENEC mark
		Warranty period	5 years

Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.
---------	--

Constant light output	No
Number of products on MCB of 16 A type B	24
EU RoHS compliant	Yes
Service tag	Yes
Product family code	DN460B [ 150mm]
Unified glare rating CEN	22

## Light Technical

Optical cover/lens type accessory	-
-----------------------------------	---

## Operating and Electrical

Input Voltage	220-240 V
Input Frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Initial CLO power consumption	- W W
Average CLO power consumption	- W W
Inrush current	20.4 A
Inrush time	0.195 ms
Power Factor (Min)	0.9

## Controls and Dimming

Dimmable	Yes
----------	-----

## Mechanical and Housing

Housing Material	Polycarbonate
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover/lens material	-
Fixation material	-
Optical cover/lens finish	-
Overall height	77 mm
Overall diameter	166 mm
Color	White RAL 9003

Dimensions (Height x Width x Depth)	77 x NaN x NaN mm (3 x NaN x NaN in)
-------------------------------------	--------------------------------------

## Approval and Application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]

## Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1125 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	124 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.38, 0.38) SDCM <3.5
Initial input power	9 W
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L80

## Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	Yes

## Product Data

Full product code	871869979342500
Order product name	DN460B LED11S/840 PSD-VLC-E C ELP3 WH P
EAN/UPC - Product	8718699793425
Order code	912500100537
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	912500100537
Net Weight (Piece)	1.250 kg




Dimensional drawing

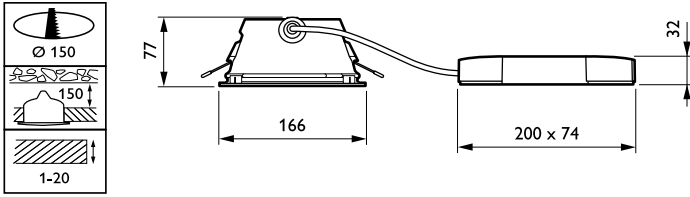


GreenSpace gen2 DN460B-DN473B

Photometric data

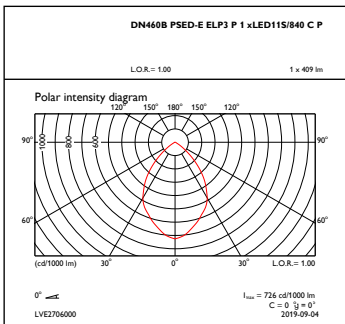

OFPC1\_DN460BPSED-EELP3P1xLED11S840CP

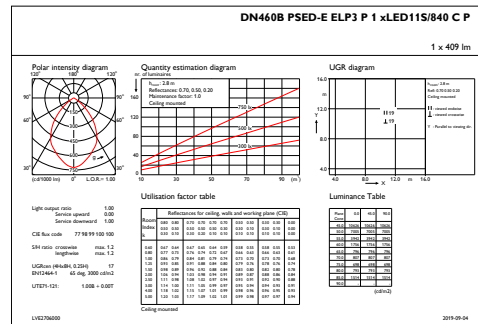

IFGU1\_DN460BPSED-EELP3P1xLED11S840CP

