



MASTER TL5 High Efficiency Eco

MASTER TL5 HE Eco 25=28W/840 UNP/40

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HE Eco lamp offers excellent lumen maintenance and colour rendering. Application areas vary from offices and industry to schools and retail environments.

Warnings and Safety

- A reduction in energy consumption is only achieved with current-controlled gear.
- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	G5 [G5]
Life to 50% failures preheat (nom.)	25000 h
Features	na [Not Applicable]
LSF preheat 2,000 hours rated	99 %
LSF preheat 4,000 hours rated	99 %
LSF preheat 6,000 hours rated	99 %
LSF preheat 8,000 hours rated	99 %
LSF preheat 16,000 hours rated	99 %
LSF preheat 20,000 hours rated	94 %
Light Technical	
Colour Code	840 [CCT of 4,000 K]
Luminous flux (nom.)	2900 lm


Luminous flux (rated) (nom.)	2600 lm
Colour designation	Cool White (CW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	114 lm/W
Correlated Colour Temperature (Nom)	4000 K
Luminous efficacy (rated) (nom.)	103 lm/W
Color rendering index (max.)	85
Colour-rendering index (min.)	80
Colour rendering index (nom.)	82
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %

MASTER TL5 High Efficiency Eco

LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %
Operating and Electrical	
Power (Rated) (Nom)	25.2 W
Lamp current (nom.)	0.170 A
Temperature	
Design temperature (nom.)	35 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy efficiency label (EEL)	A+
Mercury (Hg) content (nom.)	1.4 mg

Energy consumption kWh/1,000 hours	28 kWh
Product Data	
Full product code	872790082589300
Order product name	MASTER TL5 HE Eco 25=28W/840 UNP/40
EAN/UPC – product	8711500880017
Order code	82589300
Local code	25840TL5ECO
Numerator – quantity per pack	1
SAP numerator – packs per outer box	40
Material no. (12 NC)	927990984031
Net Weight (Piece)	105.800 g
ILCOS code	FDH-25/40/1B-L/P-G5-16/1150


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE Eco 25=28W/840 UNP/40	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm

TL5 HE Eco 25=28W/840

Photometric data

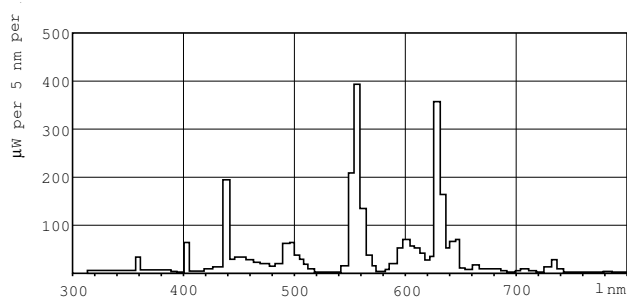


Lightcolour /840

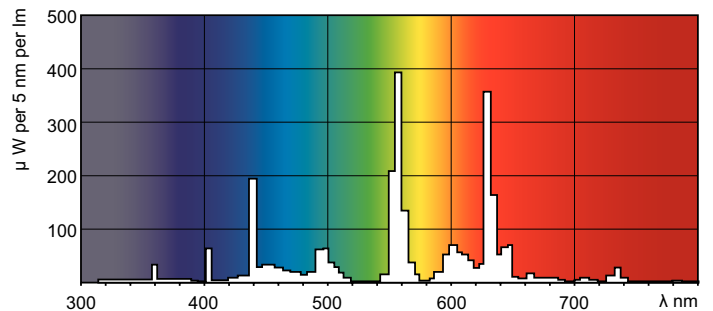

Lightcolour /840


MASTER TL5 High Efficiency Eco

Lifetime



LDLE_TL5HEECO_0001-Life expectancy diagram

LDLE_TL5HEECO_0002-Life expectancy diagram

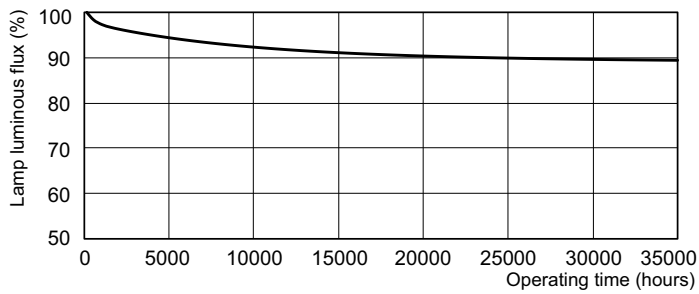

LDLM_TL5HEECO_0001-Lumen maintenance diagram

