



# TL-E Circular Standard Colours

## TL-E 32W/54-765 1CT/12

This circular TL lamp (tube diameter 29 mm) enables omni-directional light distribution. It is suitable for use in a wide range of luminaires for various purposes where color rendering is not important.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Product data

General Information		Lamp Current (Nom)		0.450 A
Cap-Base	G10Q [ G10q]	Voltage (Nom)	81 V	
Life to 50% Failures (Nom)	13000 h	<b>Controls and Dimming</b>		
<b>Light Technical</b>		Dimmable	Yes	
Color Code	54-765	<b>Approval and Application</b>		
Luminous Flux (Nom)	1750 lm	Energy Efficiency Label (EEL)	B	
Color Designation	Cool Daylight	Mercury (Hg) Content (Nom)	9 mg	
Lumen Maintenance 10000 h (Nom)	73 %	<b>Product Data</b>		
Lumen Maintenance 2000 h (Nom)	83 %	Full product code	871150063387315	
Lumen Maintenance 5000 h (Nom)	74 %	Order product name	TL-E 32W/54-765 1CT/12	
Correlated Color Temperature (Nom)	6200 K	EAN/UPC - Product	8711500633873	
Luminous Efficacy (rated) (Nom)	57 lm/W	Order code	928026305460	
Color Rendering Index (Nom)	72	Numerator - Quantity Per Pack	1	
<b>Operating and Electrical</b>		Numerator - Packs per outer box	12	
Power (Nom)	32.0 W			

## TL-E Circular Standard Colours

Material Nr. (12NC)	928026305460
Net Weight (Piece)	95.000 g
ILCOS Code	FSC-32/62/2A-E-G10q-29/299


### Dimensional drawing




TL-E 32W/54-765

Product	D (max)	D (min)	E (min)	E (max)	I (min)	I (max)
TL-E 32W/ 54-765 1CT/12	30.9 mm	27.1 mm	299.0 mm	303.5 mm	241.0 mm	246.0 mm

### Photometric data

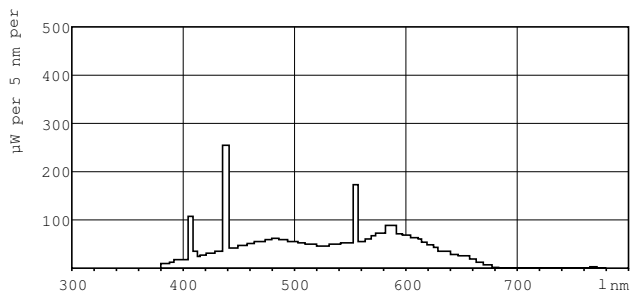

LDPB\_TL-ESTD\_54-765-Spectral power distribution B/W

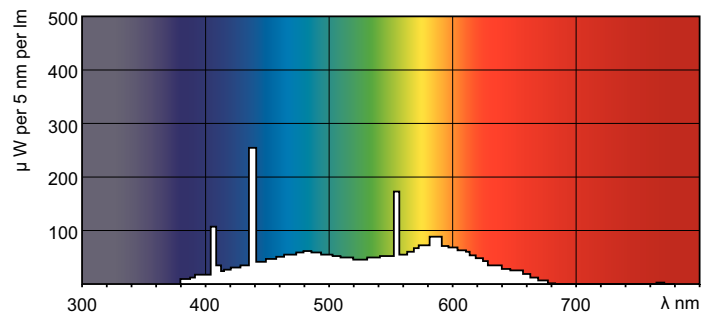

LDPO\_TL-ESTD\_54-765-Spectral power distribution Colour

