



TL-D consumer products

TL-D 18W/830 1PP/10

The lamp can be operated in existing TL-D luminaire and is available in a wide range of wattages and colors.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Color Designation	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		Warm White (WW)
Life To 10% Failures (Nom)	12000 h	Chromaticity Coordinate X (Nom)	0.44
Life to 50% Failures (Nom)	15000 h	Chromaticity Coordinate Y (Nom)	0.403
Life to 50% Failures Preheat (Nom)	20000 h	Correlated Color Temperature (Nom)	3000 K
LSF 2000 h Rated	99 %	Luminous Efficacy (rated) (Nom)	75 lm/W
LSF 4000 h Rated	99 %	Color Rendering Index (Nom)	82
LSF 6000 h Rated	99 %	LLMF 2000 h Rated	96 %
LSF 8000 h Rated	99 %	LLMF 4000 h Rated	95 %
LSF 12000 h Rated	89 %	LLMF 6000 h Rated	94 %
LSF 16000 h Rated	33 %	LLMF 8000 h Rated	93 %
LSF 20000 h Rated	2 %	LLMF 12000 h Rated	92 %
Flux measurement reference	Sphere	LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light Technical		Operating and Electrical	
Color Code	830 [CCT of 3000K]	Power (Nom)	18.2 W
Luminous Flux (Nom)	1350 lm	Lamp Current (Nom)	0.360 A
Luminous Flux (Rated) (Nom)	1350 lm		

TL-D consumer products

Temperature	
Design Temperature (Nom)	25 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	T8 [26 mm (T8)]
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	2 mg
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	19 kWh

EPREL Registration Number	423359
Product Data	
Full product code	87115006247725
Order product name	TL-D 18W/830 1PP/10
EAN/UPC - Product	8711500624772
Order code	927920083022
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927920083022
Net Weight (Piece)	71.000 g
ILCOS Code	FD-18/30/1B-E-G13


Dimensional drawing

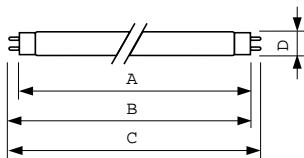


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 18W/830 1PP/10	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

TL-D 18W/830

Photometric data

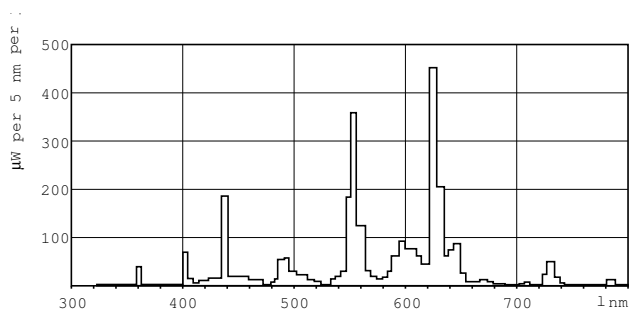


LDPB_TL-D8_830_0001-Spectral power distribution B/W

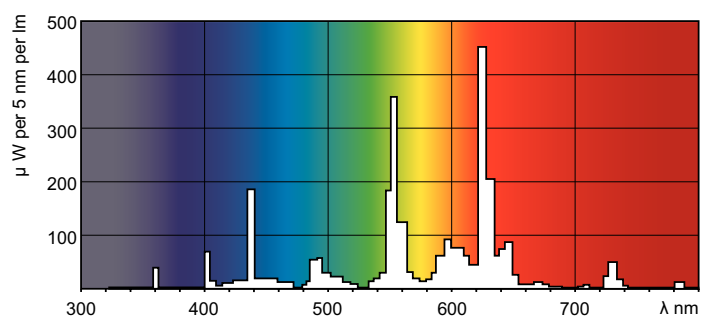

LDPO_TL-D8_830_0001-Spectral power distribution Colour

TL-D consumer products

Lifetime

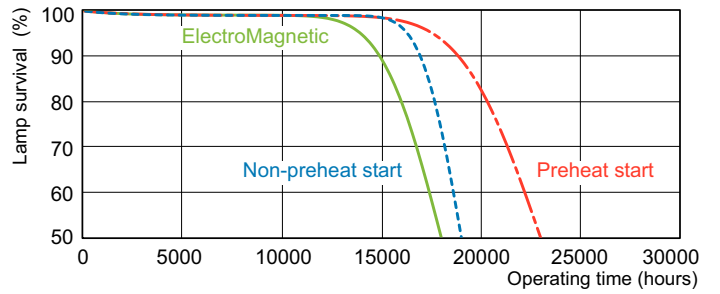

LDLE_TL-D8_0001-Life expectancy diagram

LDLE_TL-D8_0002-Life expectancy diagram



LDLM_TL-D8_0001-Lumen maintenance diagram

