



# MASTER LEDtube EM/ Mains T8

## MASTER LEDtube 1200mm UO 16W 830 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. For those that are looking for value for money within limited budget and re-lamping efforts for better light effect and lifetime.

### Warnings and Safety

- NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.

### Product data


General Information		LLMF At End Of Nominal Lifetime (Nom) 70 %	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]	<b>Operating and Electrical</b>	
EU RoHS compliant	Yes	Input Frequency	50 to 60 Hz
Nominal Lifetime (Nom)	50000 h	Power (Nom)	16 W
Switching Cycle	200000X	Lamp Current (Max)	75 mA
<b>Light Technical</b>		Lamp Current (Min)	68 mA
Color Code	830 [ CCT of 3000K]	Starting Time (Nom)	0.5 s
Beam Angle (Nom)	160 °	Warm Up Time to 60% Light (Nom)	0.5 s
Luminous Flux (Nom)	2300 lm	Power Factor (Nom)	0.9
Color Designation	White (WH)	Voltage (Nom)	220-240 V
Correlated Color Temperature (Nom)	3000 K	<b>Temperature</b>	
Luminous Efficacy (rated) (Nom)	143.00 lm/W	T-Ambient (Max)	35 °C
Color Consistency	<6	T-Ambient (Min)	-20 °C
Color Rendering Index (Nom)	83	T-Storage (Max)	65 °C

# MASTER LEDtube EM/Mains T8

T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	55 °C
<b>Controls and Dimming</b>	
Dimmable	No
<b>Mechanical and Housing</b>	
Product Length	1200 mm
<b>Approval and Application</b>	
Energy Efficiency Label (EEL)	A++
Energy Saving Product	Yes
Approval Marks	TUV CE marking RoHS compliance KEMA Keur certificate

Energy Consumption kWh/1000 h	16 kWh
<b>Product Data</b>	
Full product code	871869668736900
Order product name	MASTER LEDtube 1200mm UO 16W 830 T8
EAN/UPC - Product	8718696687369
Order code	929001297802
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001297802
Net Weight (Piece)	0.251 kg



## Dimensional drawing

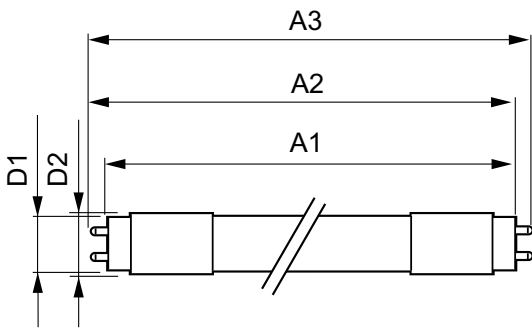

TLED 4ft 16W-36W 2300lm 160D 3000K G13ND

Product	D1	D2	A1	A2	A3
MASTER LEDtube 1200mm UO 16W 830 T8	25.78 mm	28 mm	1198.2 mm	1205.3 mm	1212.4 mm

## Photometric data

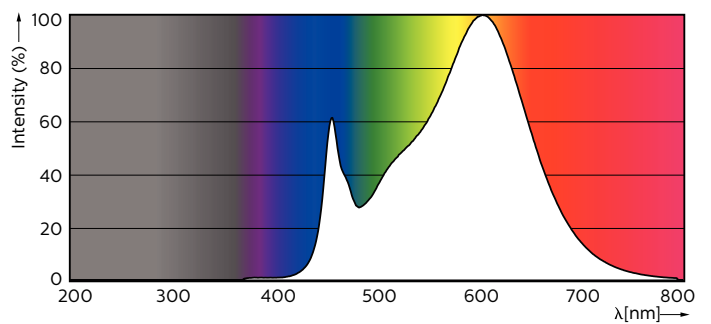

LEDtube 1200mm UO 16W 830 T8

LEDtube 1200mm UO 16W 830 T8

# MASTER LEDtube EM/Mains T8

## Photometric data



LEDtube 600mm 1200mm 1500mm UO T8

## Lifetime



LEDtube 600mm 1200mm 1500mm UO T8



LEDtube 600mm 1200mm 1500mm UO T8

