



TL-E Circular Standard Colours

TL-E 22W/54-765 1CT/12

This circular TL lamp (tube diameter 29 mm) enables omni-directional light distribution. It is suitable for use in a wide range of luminaires for various purposes where color rendering is not important.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information		Lamp Current (Nom)		0.400 A
Cap-Base	G10Q [G10q]	Voltage (Nom)	62 V	
Life to 50% Failures (Nom)	13000 h	Controls and Dimming		
Light Technical		Dimmable	Yes	
Color Code	54-765	Approval and Application		
Luminous Flux (Nom)	1050 lm	Energy Efficiency Label (EEL)	B	
Color Designation	Cool Daylight	Mercury (Hg) Content (Nom)	9 mg	
Lumen Maintenance 10000 h (Nom)	73 %	Product Data		
Lumen Maintenance 2000 h (Nom)	80 %	Full product code	871150063390315	
Lumen Maintenance 5000 h (Nom)	71 %	Order product name	TL-E 22W/54-765 1CT/12	
Correlated Color Temperature (Nom)	6200 K	EAN/UPC - Product	8711500633903	
Luminous Efficacy (rated) (Nom)	48 lm/W	Order code	928026205460	
Color Rendering Index (Nom)	72	Numerator - Quantity Per Pack	1	
Operating and Electrical		Numerator - Packs per outer box	12	
Power (Nom)	22.0 W			

TL-E Circular Standard Colours

Material Nr. (12NC)	928026205460
Net Weight (Piece)	71.700 g
ILCOS Code	FSC-22/62/2A-E-G10q-29/210


Dimensional drawing




TL-E 22W/54-765

Product	D (max)	D (min)	E (min)	E (max)	I (min)	I (max)
TL-E 22W/54-765	30.9 mm	26.2 mm	205.0 mm	213.5 mm	149.1 mm	155.6 mm
1CT/12						

Photometric data

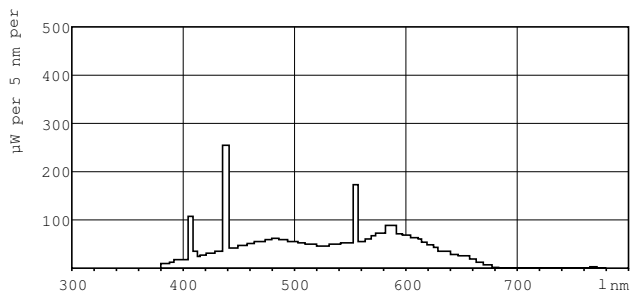

LDPB_TL-ESTD_54-765-Spectral power distribution B/W

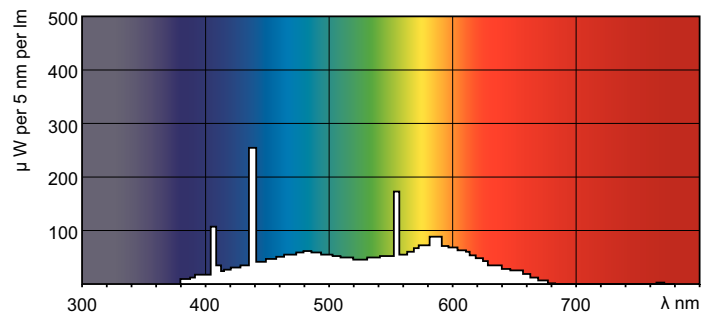

LDPO_TL-ESTD_54-765-Spectral power distribution Colour

