



MASTER TL-D 90 De Luxe



MASTER TL-D 90 De Luxe 58W/952 SLV/10

This TL-D lamp makes colors appear rich, deep and enhanced in a natural way. Thus very suitable for applications where a high color recognition is needed: first aid and treatment rooms in hospitals, printing rooms, jewelry, dentists, hairdressing, museums and shops

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information		Luminous Flux (Nom)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		4550 lm
Life To 10% Failures (Nom)	12000 h	Color Designation	Daylight
Life to 50% Failures (Nom)	15000 h	Chromaticity Coordinate X (Nom)	0.34
Life to 50% Failures Preheat (Nom)	20000 h	Chromaticity Coordinate Y (Nom)	0.351
LSF 2000 h Rated	99 %	Correlated Color Temperature (Nom)	5200 K
LSF 4000 h Rated	99 %	Luminous Efficacy (rated) (Nom)	76.1 lm/W
LSF 6000 h Rated	99 %	Color Rendering Index (Nom)	92
LSF 8000 h Rated	99 %	LLMF 2000 h Rated	96 %
LSF 12000 h Rated	89 %	LLMF 4000 h Rated	95 %
LSF 16000 h Rated	33 %	LLMF 6000 h Rated	94 %
LSF 20000 h Rated	2 %	LLMF 8000 h Rated	93 %
Flux measurement reference	Sphere	LLMF 12000 h Rated	92 %
		LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light technical			
Color Code	952		

MASTER TL-D 90 De Luxe

Operating and electrical

Power (Nom)	59.8 W
Lamp Current (Nom)	0.670 A

Temperature

Design Temperature (Nom)	25 °C
--------------------------	-------

Controls and dimming

Dimmable	Yes
----------	-----

Mechanical and housing

Bulb Shape	T8 [26 mm (T8)]
------------	------------------

Approval and application


Energy Efficiency Class	G
Mercury (Hg) Content (Nom)	2 mg

Energy Consumption kWh/1000 h	60 kWh
EPREL Registration Number	423530

Product data

Full product code	871150088871625
Order product name	MASTER TL-D 90 De Luxe 58W/952 SLV/10
EAN/UPC - Product	8711500888716
Order code	928045095081
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	928045095081
Net Weight (Piece)	167.000 g
ILCOS Code	FD-58/53/1A-E-G13


Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D 90 De Luxe 58W/952 SLV/10	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm

MASTER TL-D 90 De Luxe 58W/952 SLV/10

Photometric data


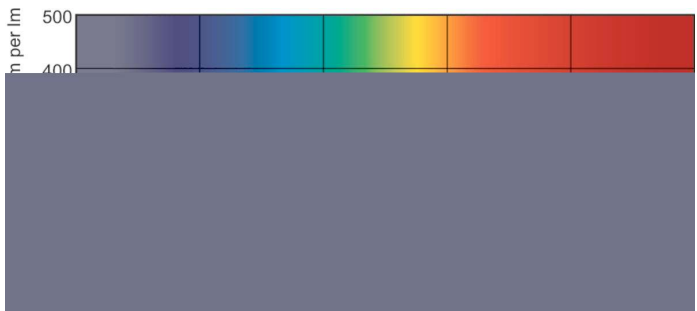


LDPB_TL-D9Hlm_950-Spectral power distribution B/W

LDPO_TL-D9Hlm_950-Spectral power distribution Colour


MASTER TL-D 90 De Luxe

Lifetime

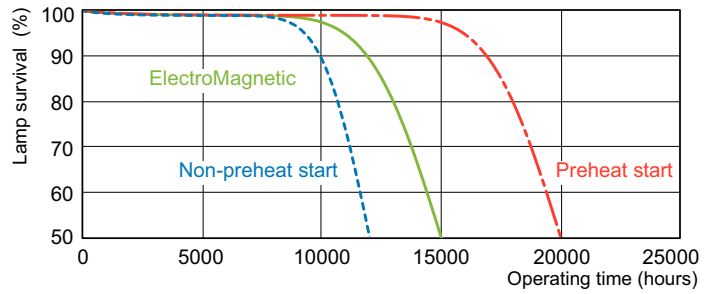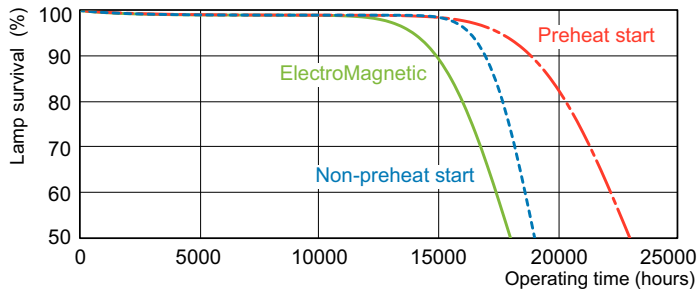

LDLE_TL-D9Hm_0002-Life expectancy diagram

LDLE_TL-D9Hm_0001-Life expectancy diagram

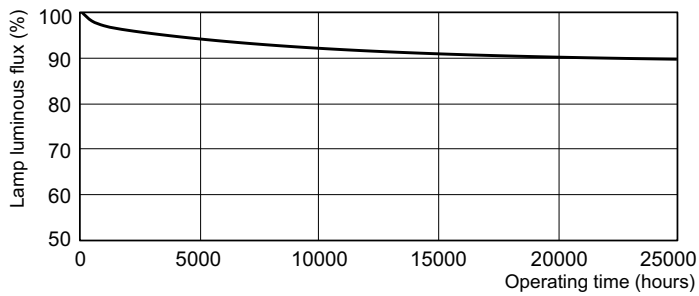

LDLM_TL-D9Hm_0001-Lumen maintenance diagram

