



# TL-D Colored

## TL-D Colored 58W Red 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		Voltage (Nom)	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]	111 V	
Life To 10% Failures (Nom)	12000 h	Temperature	
Life to 50% Failures (Nom)	15000 h	Design Temperature (Nom)	25 °C
Light Technical		Controls and Dimming	
Color Code	150	Dimmable	Yes
Luminous Flux (Nom)	75 lm	Approval and Application	
Luminous Flux (Rated) (Nom)	75 lm	Energy Efficiency Label (EEL)	E
Color Designation	Red (HO)	Mercury (Hg) Content (Nom)	13.0 mg
LLMF 2000 h Rated	98 %	Energy Consumption kWh/1000 h	82 kWh
Operating and Electrical		Product Data	
Power (Nom)	58.5 W	Full product code	871150095445940
Lamp Current (Nom)	0.670 A	Order product name	TL-D Colored 58W Red 1SL/25

## TL-D Colored

EAN/UPC - Product	8711500954459
Order code	928049001505
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25

Material Nr. (12NC)	928049001505
Net Weight (Piece)	167.000 g


### Dimensional drawing

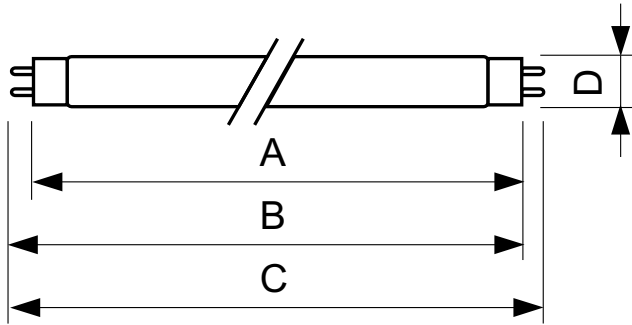


TL-D 58W/150 Red

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 58W Red 1SL/25	28.0 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm

### Photometric data

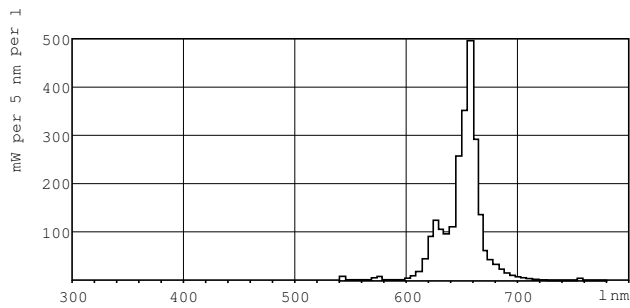

LDPB\_TL-DCOL\_150-Spectral power distribution B/W

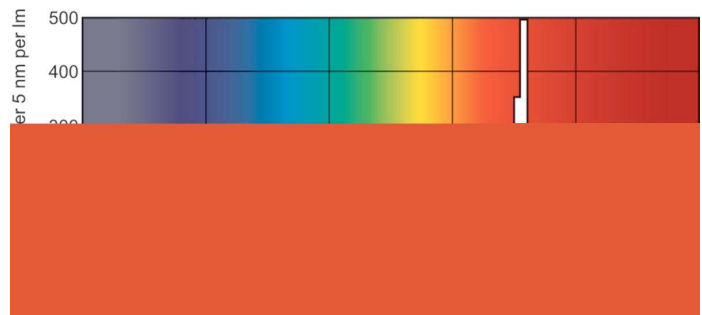

LDPO\_TL-DCOL\_150-Spectral power distribution Colour

