



# Ledinaire Batten

## BN021C LED5S/830 L300

Ledinaire Batten, 5 W, L300 mm, 480 lm, 3000 K, Opal, IP20, TW1-ready

The Ledinaire batten (BN021C) range contains a selection of popular off-the-shelf batten LED luminaires that comes with the high Philips quality levels at a competitive price. Reliable, energy efficient and affordable. Ledinaire enables, simple and flexible installation, with light-line creation possibility.

### Product data

General Information	
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Feed-through wiring	Simple Connection and removable cover available for feed-through wiring 1-phase (internal wiring is not included)
Lighting Technology	LED
Value ladder	Value
CE mark	CE mark
Warranty period	3 years
Flammability mark	For mounting on normally flammable surfaces
ENEC mark	-
Glow-wire test	Temperature 650 °C, duration 30 s
EU RoHS compliant	Yes
Light Technical	
Luminous Flux	480 lm

Saturated Red (R9)	<50
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	96 lm/W
Color rendering index (CRI)	>80
Light source color	830 warm white
Optic type	Very wide beam
Luminaire light beam spread	174°
Unified glare rating CEN	27

### Operating and Electrical


Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Inrush current	8.7 A
Inrush time	0.001 ms
Power Consumption	5 W
Power Factor (Fraction)	0.8
Connection	Plug-in connector 2-pole
Cable	-

# Ledinaire Batten

Number of products on MCB of 16 A type B	10
<b>Temperature</b>	
Ambient temperature range	-20 to +40 °C
<b>Controls and Dimming</b>	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No
<b>Mechanical and Housing</b>	
Housing Material	Polycarbonate
Reflector material	Polycarbonate
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	-
Housing Color	White
Optical cover finish	Opal
Overall length	326 mm
Overall width	28.4 mm
Overall height	35.7 mm
Dimensions (Height x Width x Depth)	36 x 28 x 326 mm
<b>Approval and Application</b>	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	-
Protection class IEC	Safety class II
Photobiological risk	Photobiological risk group 0 @200mm to EN62778

Photobiological risk specification	0.2 m
<b>Initial Performance (IEC Compliant)</b>	
Luminous flux tolerance	+/-10%
Initial chromaticity	0.43, 0.40, SDCM≤5
Power consumption tolerance	+/-10%
<b>Over Time Performance (IEC Compliant)</b>	
Control gear failure rate at median useful life	7.5 %
50000 h	
Lumen maintenance at median useful life*	L65
50000 h	
<b>Application Conditions</b>	
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Not applicable
<b>Product Data</b>	
Order product name	BN021C LED5S/830 L300
Full product name	BN021C LED5S/830 L300
Full product code	871951452785099
Order code	911401841882
Material Nr. (12NC)	911401841882
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514527850
Numerator - Packs per outer box	40
EAN/UPC - Case	8719514527959

## Dimensional drawing

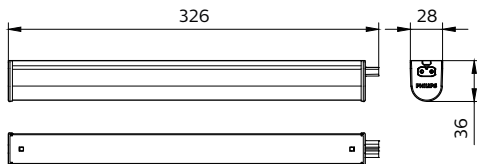

## Ledinaire Batten

