



LuxSpace, recessed

DN571B LED20S/830 PSU-E F WH

LUXSPACE 2 COMPACT DEEP - LED Module, system flux 2000 lm - 830 warm white - Power supply unit external, DC compatible for central emergency lighting - Facetted reflector - White RAL 9003

Customers are looking to optimize all their resources, and that means not just their running costs (energy, etc.) but also their human resources. Energy savings are therefore a priority, but they must not have an adverse effect on the well-being of employees, who need a pleasant environment in order to be more productive, or on customers, who want to enjoy their shopping experience. LuxSpace provides the perfect combination of efficiency, light comfort and design, without compromising on lighting performance (color rendering and color uniformity). It offers a wide choice of options for creating the desired ambience, no matter the application.

Product data

General Information	
Number of light sources	1 [1 pc]
Lamp family code	LED20S [LED Module, system flux 2000 lm]
Light source colour	830 warm white
Cap base	- [-]
Light source replaceable	No
Number of gear units	1 unit
Gear	-
Driver/power unit/transformer	PSE-E [Power supply unit external, DC compatible for central emergency lighting]
Driver included	Yes
Optic type	F [Facetted reflector]
Optical cover/lens type	No [-]

Luminaire light beam spread	70°
Emergency lighting	No [-]
Connection	Push-in connector and pull relief
Cable	-
Protection class IEC	Safety class II
Glow-wire test	Temperature 850 °C, duration 5 s
Flammability mark	F [For mounting on normally flammable surfaces]
CE mark	CE mark
ENEC mark	ENEC mark
UL mark	No
Warranty period	5 years
Decorative accessories	No [-]

LuxSpace, recessed

Remarks	*- According to the Lighting Europe guidance paper 'Evaluating performance of LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB (16 A type B)	32
EU RoHS compliant	No
Product family code	DN571B [LUXSPACE 2 COMPACT DEEP]
Unified glare rating CEN	19

Light Technical

Optical cover/lens acc. type	No [-]
------------------------------	--------

Operating and Electrical

Input Voltage	220 to 240 V
Input frequency	50 to 60 Hz
Inrush current	18 A
Inrush time	0.24 ms
Power factor (min.)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing configuration	BV [Basic version]
Housing material	Aluminium die-cast
Reflector material	Polycarbonate aluminium coated
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Optical cover/lens finish	Frosted
Overall height	119 mm
Overall diameter	214 mm
Colour	White RAL 9003

Dimensions (height x width x depth)	119 x NaN x NaN mm (4.7 x NaN x NaN in)
-------------------------------------	---

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Initial Performance (IEC Compliant)

Initial luminous flux	2100 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	111 lm/W
Init. Corr. Colour Temperature	3000 K
Init. colour rendering index	>80
Initial chromaticity	(0.43, 0.40) SDCM <3
Initial input power	19 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	5 %
Lumen maintenance at median useful life* 50,000 h	L90

Application Conditions

Ambient temperature range	+10 to +25 °C
Performance ambient temperature Tq	25 °C
Suitable for random switching	Yes


Product Data

Full product code	871829193121800
Order product name	DN571B LED20S/830 PSU-E F WH
EAN/UPC – product	8718291931218
Order code	93121800
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12 NC)	910503594515
Net Weight (Piece)	1.150 kg



LuxSpace, recessed

Dimensional drawing

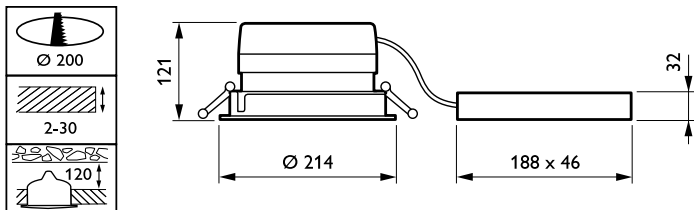

LuxSpace gen2 DN570B-DN572B

Photometric data

DN571B PSE-E 1xLED20S/830 F

1 x 2100 lm

Polar intensity diagram Quantity estimation diagram UGR diagram

IFGU1_DN571B PSE-E 1xLED20S830 F.EPS

IFPC1_DN571B PSE-E 1xLED20S830 F.EPS

