



MASTER TL5 High Efficiency

MASTER TL5 HE 21W/830 SLV/40

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | |
|------------------------------------|----------------------|
| Cap-Base | G5 [G5] |
| Life to 50% Failures Preheat (Nom) | 24000 h |
| Features | na [Not Applicable] |
| System Description | High Efficiency |
| LSF Preheat 2000 h Rated | 99 % |
| LSF Preheat 4000 h Rated | 99 % |
| LSF Preheat 6000 h Rated | 99 % |
| LSF Preheat 8000 h Rated | 99 % |
| LSF Preheat 16000 h Rated | 97 % |
| LSF Preheat 20000 h Rated | 84 % |
| Light Technical | |
| Color Code | 830 [CCT of 3000K] |
| Luminous Flux (Nom) | 2100 lm |
| Luminous Flux (Rated) (Nom) | 1850 lm |

| | |
|--|-----------------|
| Color Designation | Warm White (WW) |
| Luminous Efficacy (@ Max Lumen, Rated) (Nom) | 101 lm/W |
| Correlated Color Temperature (Nom) | 3000 K |
| Luminous Efficacy (rated) (Nom) | 90 lm/W |
| Color Rendering Index (Max) | 85 |
| Color Rendering Index (Min) | 80 |
| Color Rendering Index (Nom) | >80 |
| LLMF 2000 h Rated | 96 % |
| LLMF 4000 h Rated | 95 % |
| LLMF 6000 h Rated | 94 % |
| LLMF 8000 h Rated | 93 % |
| LLMF 12000 h Rated | 92 % |
| LLMF 16000 h Rated | 91 % |
| LLMF 20000 h Rated | 90 % |

MASTER TL5 High Efficiency

| Operating and Electrical | |
|-------------------------------|-------------|
| Power (Nom) | 20.6 W |
| Lamp Current (Nom) | 0.165 A |
| Temperature | |
| Design Temperature (Nom) | 35 °C |
| Controls and Dimming | |
| Dimmable | Yes |
| Mechanical and Housing | |
| Cap-Base Information | Green Plate |
| Approval and Application | |
| Energy Efficiency Label (EEL) | A+ |

| Mercury (Hg) Content (Nom) | 1.4 mg |
|---------------------------------|------------------------------|
| Energy Consumption kWh/1000 h | 23 kWh |
| Product Data | |
| Full product code | 871150063942455 |
| Order product name | MASTER TL5 HE 21W/830 SLV/40 |
| EAN/UPC - Product | 8711500639424 |
| Order code | 927926283055 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 40 |
| Material Nr. (12NC) | 927926283055 |
| Net Weight (Piece) | 79.200 g |
| ILCOS Code | FDH-21/30/1B-L/P-G5-16/850 |


Dimensional drawing




| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|------------------------------|---------|----------|----------|----------|----------|
| MASTER TL5 HE 21W/830 SLV/40 | 17 mm | 849.0 mm | 856.1 mm | 853.7 mm | 863.2 mm |

TL5 21W/830/GP HE

Photometric data

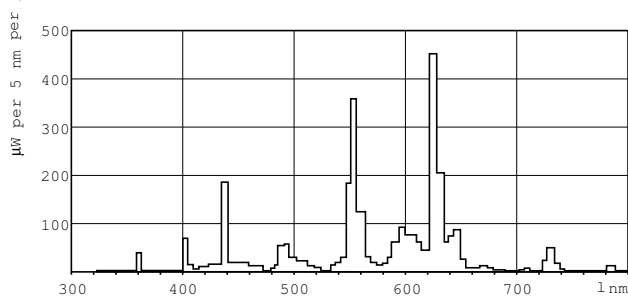

LDPB_TL5-HE8_830-Spectral power distribution B/W

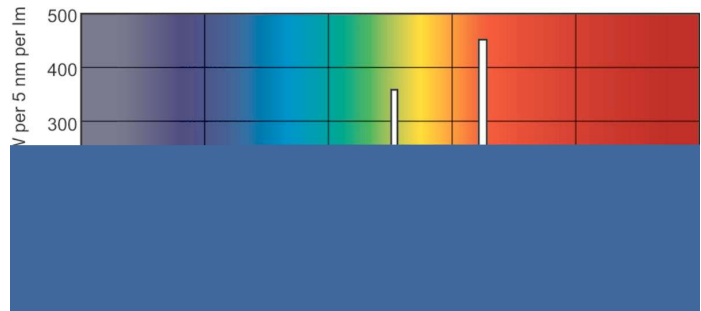

LDPO_TL5-HE8_830-Spectral power distribution Colour

MASTER TL5 High Efficiency

Lifetime



LDLE_TL5-HE8_0001-Life expectancy diagram

LDLE_TL5-HE8_0002-Life expectancy diagram



LDLM_TL5-HE8_0001-Lumen maintenance diagram

